

# CT8 CAMERA

**SUPERB CLARITY** ●


**WATER RESISTANT** ●

**RUGGED** ●

**COMPACT** ●

## TECHNICAL SPECIFICATION

image sensor  
horizontal resolution  
sensitivity  
standard lens  
power consumption  
power supply  
video output  
operating temperature  
dimentions

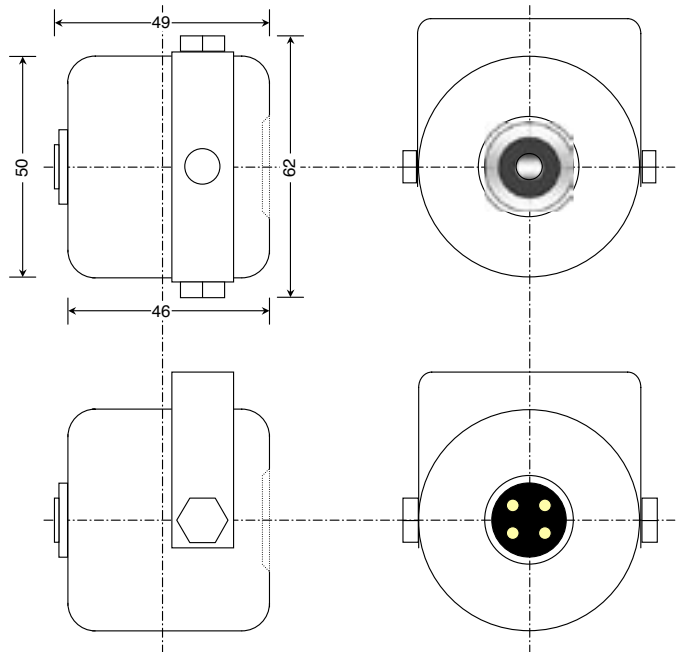

CT8	CT8C	CT8CH
1/3" interline CCD	1/3" interline CCD	1/3" interline CCD
380TVL	330TVL	450TVL
0.1Lux	1.5Lux	1.0Lux
3.6mm	3.6mm	3.6mm
100mA	60mA	60mA
12V DC	12V DC	12V DC
Composite (75Ω)	Composite (75Ω)	Composite (75Ω)
-10°C to +50°C	-10°C to +50°C	-10°C to +50°C
50mm x 46mm (W x D)	50mm x 46mm (W x D)	50mm x 46mm (W x D)